



Shown in Deep Red



## The Henley Compact – Liberty

The 'Liberty' is ideal for narrow gardens and situations where the available space is restricted. With the door on the front aspect, this office configuration still achieves the 6.4 sqm interior footprint of other buildings in the Henley Compact range.

All Compact models benefit from a high quality modular base and constructed using our unique 'sandwich panel' system. Walls are 84mm thick, featuring 18mm waterproofed and bonded plywood facing for heavy duty exterior use, while the 16mm MFC superstructure achieves rigidity and long life. Panels on all six planes feature 50mm of solid polystyrene insulation to ensure the interior retains a comfortable temperature in all weathers. Additionally, each panel is framed and supported by 46mm treated timber for solidity and longevity.


The door is household quality and fully double-glazed, with toughened glass and a reinforced base panel. Windows too, are pressure-treated, household-quality sealed units with vents and key-operated window locks. The 'Liberty' features an upgraded window configuration consisting of one standard window and one feature window, enhancing the exterior and affording a light, bright interior. The base is manufactured from heavy-duty tanalised timber that is 44mm thick and the floor is constructed from 80mm closed panels that include vapour barriers as well as 50mm polystyrene insulation. The ceiling also includes 50mm solid insulation.

The roof is constructed from plastic-coated steel, built to withstand all climate conditions and designed to be maintenance-free for a minimum 20 year period.

# The Henley Compact – Liberty

## Configuration options

The Compact **Liberty** is available in a choice of configurations, allowing you to meet your precise requirements regarding access and location.

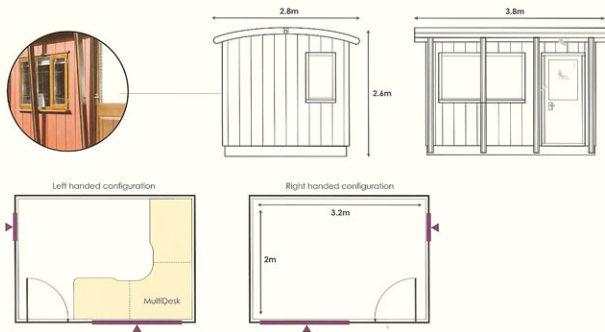

### Building dimensions

- Interior: Length 3.2m Width 2m Height 2.1m
- Exterior: Length 3.8m Width 2.8m Height 2.6m

### Desks

The Henley MultiDesk provides an exceptional working environment. Designed exclusively for the Henley user it provides ample work surfaces and plentiful storage space all within arm's reach.

### Seating & storage

We supply several ranges of office furniture that have been approved for use with the Henley range. Please see our separate brochure.

### Doors

- Sealed unit conforms to BS6206
- Reinforced base panel
- Five-lever mortice lock (BS3621)

### Windows

- Household-quality conforming to BS644 (pt. 1) & BS942
- 24 mm double-glazed sealed units
- Key-operated window locks
- All window handles have a lockable 'night-vent' facility
- Trickle vents to all windows
- Weather-tested to BS6375 Part 1

### Joinery finish

- Doors and windows finished in Sikens Cetol Filter 7, an extreme durability wood stain system, conforming to BS EN 927-1

### Exterior treatments

- Flood solid colour stain provides extra protection for exposed timber/sidings
- Unique combination of resins maintains coating's film integrity in all weathers
- Mildew-resistant finish also includes ultra-violet absorbers to reduce sunlight degradation

### Insulation & construction

- All six planes fully-insulated with 50mm solid polystyrene
- Doors and windows feature sealed double-glazing
- Walls and ceilings lined with 16mm white melamine-faced panelling
- Exterior clad in heavy duty 18mm construction grade ply panels

### Structural timber treatment

- Base constructed from tanalised, pressure-treated timber

### Roofing

- Coverworld roof sheeting is profiled from alloy-coated flat steel, sheet-manufactured to EN 10 147: 1992
- Coverworld roof sheeting features a reverse coat of grey polyester. The exposed face is supplied in Plastisol, a 200 micron, external grade, PVC coating

### Electrics

- 3 x double sockets
- Consumer unit supplied for mains power connection
- 2 x double spot lamps (60 watts) supplied
- Fully pre-wired to BS7671: 2002