



Shown in Hudson Grey



The Henley Compact – Ultra

The Compact Office Ultra is the most striking of the Compact Range. Based on the same platform as others in the range, it has a completely redesigned exterior using contemporary materials for a distinctive style.

Key aspects of the design include:

- **Security**
uPVC windows and doors with uprated security features
- **Environment**
Contemporary appearance suited to urban homes
- **Style**
Stainless steel flashing and alloy supports complete the look

Windows are sealed unit double-glazed uPVC with one large feature window and one standard window, the door is also uPVC. All windows and doors have high security 3 point shoot bolts.

All our products boast a high quality modular base and are constructed from our unique "sandwich" panels. Walls are 84mm thick: 18mm waterproofed and bonded plywood facing (for heavy duty exterior use); 16mm MFC superstructure (for rigidity and long life); 50mm of solid polystyrene insulation to ensure the interior always remains at a comfortable temperature. Each panel is framed and supported by 46mm pretreated timber for solidity and longevity.

The base is manufactured from heavy duty tanalised timber that is 44mm thick, and the floor is constructed of 80mm closed panels which include vapour barriers and 50mm insulation. The ceiling also includes 50mm solid insulation.

The roof is constructed of plastic coated steel built to withstand extremes of weather and is designed to be maintenance free for over 20 years.




The Henley Compact – Ultra

Configuration options

Windows

The Compact Office Ultra can be configured with windows on either side of the office at no extra cost.

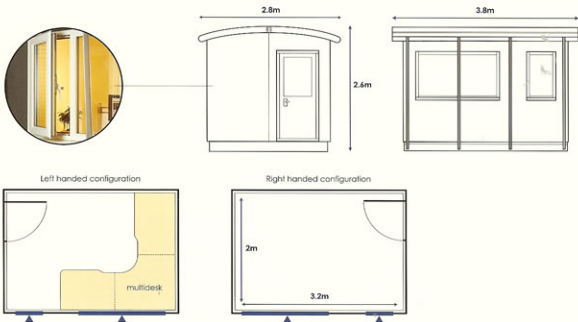

Building dimensions

- Interior: Length 3.2m Width 2m Height 2.1m
- Exterior: Length 3.8m Width 2.8m Height 2.6m

Desks

The Henley MultiDesk provides an exceptional working environment. Designed exclusively for the Henley user it provides ample work surfaces and plentiful storage space all within arm's reach.

Sealing & storage

We supply several ranges of office furniture that have been approved for use with the Henley range. Please see our separate brochure.

Doors & windows

- 28mm sealed units
- Pilkington 'K' glass (meets the highest building regulations)
- Fully welded system
- Completely re-inforced where necessary
- Sculptured beading
- Manufactured to quality system BS EN ISO 9002
- Glass sealed units: BS5713 Kite Mark No. 12084, BS6206, Kitemark 36391
- Hinges: BS EN 150 9001: Cert No. 005 105

Window construction

- Locking dead bolts fitted to all opening windows for security
- White push button locking window handles
- All window handles have a night vent facility
- Locking system – windows: BS7950: 1997

Door lock

- Door fitted with high security dead bolts
- Locking system – Doors: PA5 24

Weather testing

- BS6375 Part 1

Structural timber treatment

- Tanalised pressure treated timber

Roofing

Coverworld steel sheeting is profiled from alloy coated flat steel sheet manufactured to EN 10 147: 1992.

Coverworld steel sheeting has a reverse coat of grey polyester. The exposed face is supplied in Plastisol: 200-micron external grade PVC coating PVC: 27-micron thick Polyvinyl Fluoride coating Polyester: Lining Enamel.

Electrics

- 3 x double sockets
- Consumer unit supplied for mains power connection
- 2 x double spot lamps (60 watts) supplied
- Fully pre-wired to BS7671: 2002 Amendment

