You have a choice of wall thicknesses with Gardival® garages: 28 or 45 mm.
These garages are made in untreated Nordic pine. They are constructed like log cabins.

Depending on the model, you have the following choice of roof claddings: Felt shingles, steel tile sheets, concrete tiles.

Our years of experience and modern machinery guarantee a top-class finished product.
The care taken to find new techniques and models, as well as our concern for detail ensure first-rate construction quality.

This section contains an overview of possible finishing per model. They can also be made to measure.
Please also refer to the **Quick-Pro range, where you'll find a number of garages in a standard design** and available ex-stock (see pages 52 - 53).





Timber thickness availability

Garages
Interlocking systems

Classic line
(Wall thickness 28 / 45 mm) 32

Mono Line
(Wall thickness 28 mm) 33

Modern line
(Wall thickness 28 / 45 mm) 34

Gardival uses
a soft pencil
to portray
a heavenly garage

GARDIVAL®

1

2

3

Classic line Mono line

The challenge for your garden!

You can choose the wall thickness of these garages: 28 or 45 mm. The garages are untreated. Windows are with original cross bars. Doors and windows are finished with black metal work.

Roof claddings in the Classic line are always fixed to 16 mm boards. If you choose roof cladding in shingles or steel tiles, the roof pitch is ± 18°. If you choose cement tiles, the wall thickness becomes 45 mm and the roof pitch 25°. However, in the Mono line, the pitch is always 14°. Note that you cannot choose cement tiles with this model.

The front overhang measures 50 cm for the Classic and 30 cm for the Mono line. A Classic line garage with a 5.2 m side wall has 1 fixed window with decorative shutters in the side wall. A garage with a 6 m side wall has 2 windows in the side wall.

A garage with a 6 m front has 2 double hinged solid wood doors at the front. Fronts of 3, 3.5 and 4.2 m have only 1 double hinged solid wood door.
All Classic line garages have a decorative fascia board at the front and a plain fascia board at the rear.
The design on the Mono line requires a plain fascia board all round. Wall board edges are straight.

The Classic & Mono line garages options are listed on the back flap.

Standard garage Classic line

Dimensions	
Front	3 / 3,5 / 4,2 m (1)
	6 m (2)
Side wall	5,2 m (3)
	6 m (4)
Side wall height	201,5 cm
Wall thickness	28 / 45 mm
Finish	
Fixed window	101 x 95 cm (3)
2 fixed windows	101 x 95 cm (4)
Shutters	decorative
Garage door	
-double hinged solid wood	235 x 190 cm (1)
-2 double hinged solid wood	235 x 190 cm (2)
Opening direction	outwards
Roof cladding	
Felt shingles	
Steel tiles	
Concrete tiles (only with 45 mm wall thickness)	

1 **Garage Classic 28 mm - 3 x 5,2 m**
Picture: shingle roof cladding, fixed window with decorative shutters
Options shown: pressure-treated, up & over door with wood

2 **Garage Classic: 28mm - 3 x 6 m**
Picture: steel tiles, 2 fixed windows with decorative shutters, double hinged solid wood doors
Options shown: pressure-treated, 2 flower boxes, guttering

3 **Garage Classic 45 mm - 6 x 6 m**
Picture: steel tiles terracotta, 2 fixed windows without shutters, 2 double hinged solid wood doors
Options shown: pressure-treated, front roof overhang ±80 cm

4

5

4 **Garage Classic 28 mm - 4,2 x 6 m**
Picture: shingle roof cladding, 2 fixed windows with decorative shutters, double hinged solid wood door
Options shown: pressure-treated, guttering

5 **Garage Mono 45 mm 3 x 8 m**
Picture: shingle roof cladding, double hinged solid wood door
Options shown: pressure-treated, without windows, 3 walls building, straight fascia boards

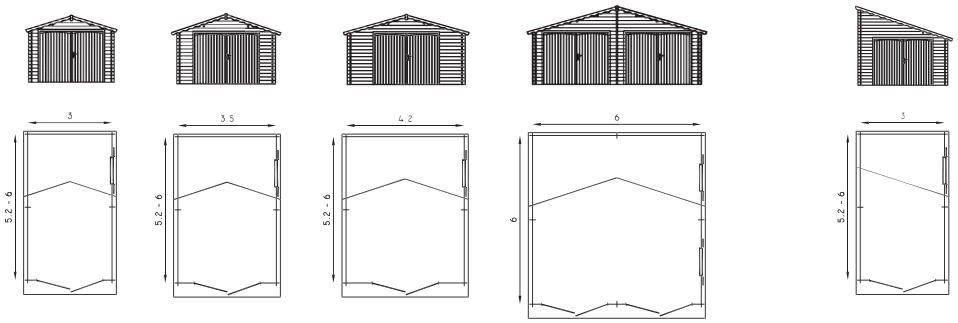

Classic 3m | Classic 3,5m | Classic 4,2m | Classic 6m | Mono 3m

Concrete base = garage dimensions

Standard garage Mono line

Dimensions	
Front	3 m (1)
Side wall	5,2 m (2)
	6 m (3)
Height low side wall	201,5 cm
Height high side wall	279,5 cm
Wall thickness	28 / 45 mm

Finish	
Fixed window	101 x 95 cm (2)
2 fixed windows	101 x 95 cm (3)
Shutters	decorative
Garage door	
double hinged solid wood	235 x 190 cm (1)
Opening direction	outwards

Roof cladding
Felt shingles
Steel tiles

GARDIVAL®

1

Modern line

Modern & dynamic design!

You can choose the garage wall thickness:
28 or 45 mm.
All Modern line garages are untreated. They have multi-panel windows and decorative shutters.

Doors and windows are finished with black metal work. The low and high side walls mean a slight roof pitch which is neatly concealed behind a continuous straight decorative fascia board.
The front eaves measure ± 30 cm.

A Modern line garage has 1 double hinged solid wood door in the front. The garages always have 1 fixed window in the 5.2 m side wall version and 2 fixed windows in the 6 m version.

All standard Modern line garages have a 12 cm Ø guttering and a PVC drain pipe. Wall board edges are straight.

The Modern line garages options are listed on the back flap.

MODERN 3 M



MODERN 3,5M



MODERN 4,2 M



Concrete base = garage dimensions

1 **Garage Modern 28 mm - 3,5 x 6 m**
Picture: steel tiles, guttering & drainpipe, fixed window 101 x 95 cm
Options shown: pressure-treated, up & over door cladded with wood
Note: fascia board provided by owner

3 **Garage Modern 28 mm - 3,5 x 5,2 m**
Picture: steel tiles, guttering & drainpipe, double hinged solid wood door, fixed window with decorative shutters
Options shown: pressure-treated

2 4 **Garage Modern 28 mm - 3,5 x 8 m**
Picture: steel tiles, guttering & drainpipe
Options shown: 16 mm roof boards, pressure-treated, 1 fixed window 56 x 121 cm, 2 m garage extension with double sliding door with acid glass, deck awning

2

3

4

Standard garage Modern line

Dimensions	
Front	3 / 3,5 / 4,2 m
Side wall	5,2 m (1)
	6 m (2)
Height low side wall	221 cm
Height high side wall	234 cm
Wall thickness	28 / 45 mm

Finish	
Fixed window	101 x 95 cm (1)
2 fixed windows	101 x 95 cm (2)
Shutters	decorative
Garage door	
double hinged solid wood	235 x 190 cm
Opening direction	outwards

Roof cladding
Steel sheets

GARDIVAL®